

Raw Materials – what goes in is important

“The first step is always the hardest”. This also applies when formulating a coating. The application of the final finish determines the selection of the raw materials. Not only are mechanical properties like abrasion resistance and adhesion important, but also optical attributes like color, gloss and opacity; and one cannot forget the overall costs of the formulation. In order to guarantee consistent quality a routine quality control system needs to be established at the very first production step.

Paint is a liquid or powdery coating that is applied on objects as a very thin layer. By means of chemical or physical processes, it converts to an adherent film. Paint normally consists of the following components:

- Pigments
- Binder
- Fillers
- Additives
- Solvents / Water (not in powder coatings)

Pigments


Pigments are fine solid particles, which are substantially insoluble in the vehicle. They ensure hiding of the background and generate the color impression. In modern industrial coatings, solid absorption pigments, as well as metallic and pearlescent pigments are used.

Metallic pigments

Metallic pigments are very thin platelet-shaped particles made out of aluminum or bronze. They act like small mirrors and directly reflect the light causing a light-dark flop when changing viewing angle. Depending on the aluminum granulates and the process used, either irregular Cornflakes or round Silver Dollar particles are formed. Their properties, such as brilliance



(sparkle and metallic gloss), flop, distinctness of image etc., are influenced by particle size / shape, particle-size distribution and smoothness of the surface. The coarser the pigments and the rounder their shape, the higher the proportion of reflected light and, thus, the more the metallic look is pronounced.

In the graph below a comparison of three silver dollar pigments with different flake size (25 μm – 34 μm – 54 μm) is shown. Visually, the silver finish with the coarser aluminum pigment appears more sparkling under direct illumination and grainier under diffused lighting.

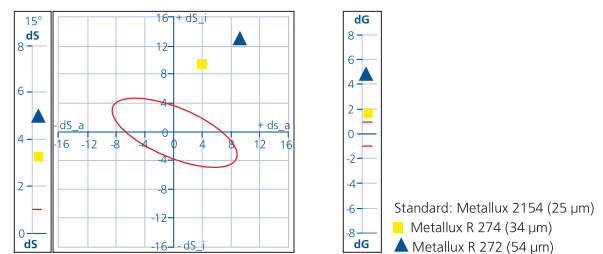

The BYK-mac i data correlate with the visual judgment: sparkle area, sparkle intensity and graininess increase with flake size.

BYK-Gardner Solution

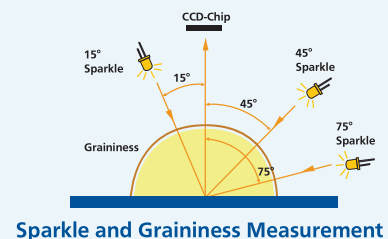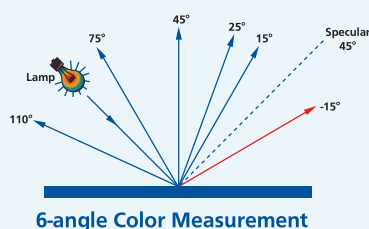



Color Measurement of Titanium dioxide (TiO₂)

Titanium dioxide is the brightest, whitest pigment available. Due to its high refractive index (even higher than diamond) it effectively scatters the light and provides maximum opacity for a coating. Rutile is the most common natural form of TiO₂ and preferred over anatase because of the lower photocatalytic activities and thus, better weather stability of the final coating.

The purity of TiO₂ is process related. The chloride process makes up purer and brighter grades than the sulfate process. Additionally, impurities introduced by treatment chemicals or extraneous metal ions within the crystallites can degrade brightness. They usually discolor the pigment towards grey or yellow.

One way to perform a color measurement is to incorporate the TiO₂ pigment into the coatings system of the final application. To ensure a smooth and homogeneous surface, the paint is applied to opacity drawdown charts with an automatic film applicator. The charts are made of black and white areas that are large enough to be measured with color instruments. An alternative is to take readings on dry pressed pucks. The pucks are made by applying high pressure to the dry TiO₂ which is contained by a ring. The pressure is essential as it is the driving force to compact the pigment and hold it together for measurement. The face of the puck is then measurement with a spectrophotometer.

The standardized CIE colorimetric values L* and b* are used to characterize brightness and undertone: the higher the L* value, the higher the brightness, the lower the b* value, the less yellow the appearance. In the table below, results for different grades of TiO₂ are displayed. The spectro2guide can be used to measure CIELab color numbers. The instrument stores and directly transfers measurement data to smart-chart data analysis Software.

	Grade 1	Grade 2	Grade 3	Grade 4
Brightness L*	96.6	97.4	97.3	97.2
Undertone b*	2.1	1.5	1.5	1.5

Besides brightness and undertone, optimum hiding power and tinting strength are properties that the TiO₂ pigment has to meet (see page 20 "Architectural Coatings" and page 28 "Industrial Coatings").

BYK-Gardner Solution



Solid Color & Gloss
spectro2guide



Gloss
micro-gloss




Gloss & Haze
haze-gloss

Gloss and Haze Measurement of Titanium dioxide (TiO₂)

Gloss and haze level of a TiO₂ pigment is mainly controlled by the primary particle size and the number of particles with a diameter larger than 0.5 µm. To achieve glossy finishes with improved distinctness of image, oversized particles have to be minimized. The haze-gloss is an objective tool to measure matte to high-gloss surfaces by offering three gloss geometries (20°, 60°, 85°) as well as reflectance haze measurement in one unit. However, to measure gloss and haze the TiO₂ has to be incorporated in the coatings system and a drawdown has to be made.

Gloss and Haze dependent on dispersing time

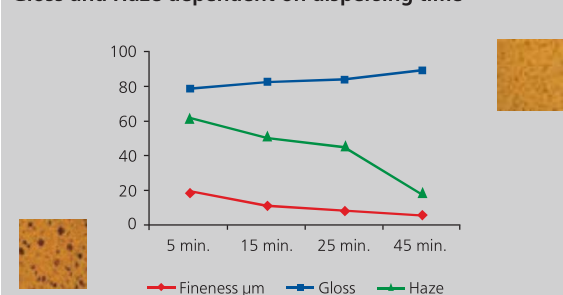

During the dispersion process, the pigments are dispersed into small particles: the smaller the particles, the smoother the surface. The graph above shows the influence of degree of dispersion on gloss and haze. Pigment particles that are smaller than 10 µm show a tremendous reduction in haze and a slight increase in gloss, resulting in a glossy finish with improved imaging forming qualities.


Absorption pigments

Organic and inorganic absorption pigments selectively absorb and scatter the incident light. Besides the color itself, tinting strength is one of the most important properties that need to be controlled. Tinting strength is directly influenced by the pigment type and concentration used in the coating system (see page 28 "Industrial Coatings").

Fillers

Fillers are solid particles, which are virtually insoluble in the vehicle. They serve to increase the volume of the paint and to improve mechanical and optical properties. They are usually less expensive than other pigments and reduce the overall costs of a paint formulation. Among all, calcium carbonate fillers are quantitatively the most important class. They exhibit a neutral tone and a high brightness ($L^* \geq 95$) and can therefore be used to substitute TiO₂. As their mean particle size is larger and their refractive index is lower, care has to be taken to achieve the required hiding power. New synthetically produced calcium carbonate types are available which consider the aforementioned. In a medium class interior paint formulation with 12.5 % TiO₂ and a PVC (pigment volume concentration) of 76 % the amount of TiO₂ was substituted 1:1 by the new calcium carbonate type. The graph below shows the results: Opacity as well as brightness compared to the standard formulation did not change up to a TiO₂ substitution of 60 %.¹⁾

Substitution of TiO₂

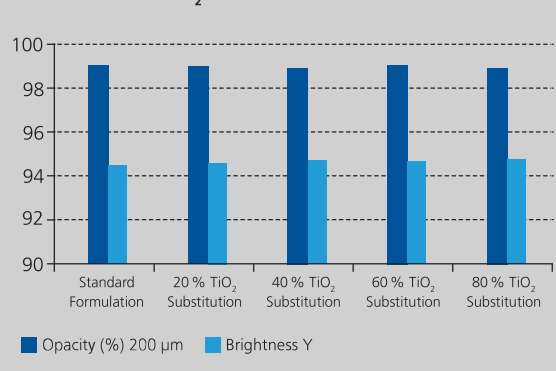

In this experiment only an increase in 85° gloss from 4 to 7 gloss units was monitored.

¹⁾ Dr. Petra Fritzen; Solvay Chemicals GmbH: Ein gut gefülltes Paket; Farbe und Lack (June 2015); page 58 – 62



Automatic Film Applicator
byko-drive



Drawdown Test Charts
byko-charts



Applicators
Bar applicatos